



Vertically Integrated, Made in the USA



### THE SPECIALTY MFG. CO.

5858 Centerville Road • St. Paul, MN 55127-6804

Tel: (651) 653-0599 • Fax: (651) 653-0989

www.specialtymfg.com • e-mail: info@specialtymfg.com

## 2000 SERIES BALL VALVE

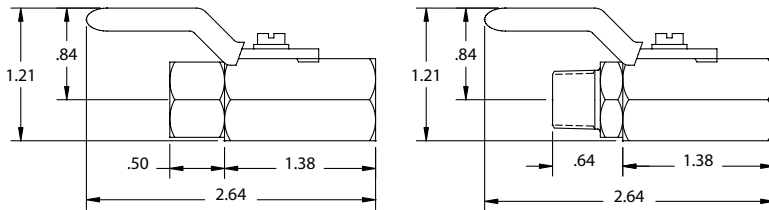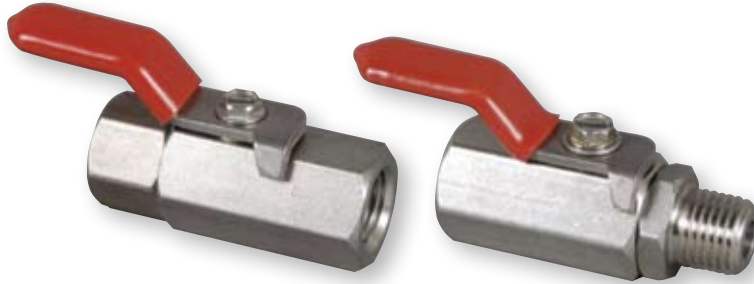

### Design Considerations

The 2000 Series Two-Way Ball Valve compact design has a two-piece body and end construction to cover 1/4" NPT end configuration applications. The 2000 Ball Valve Series is rated to 500 psi and will support flow and pressure in either direction. The Stainless Lever Handle with Red Sleeve is standard. Handles can be ordered Reversed - to lie over the outlet when the valve is in the open position.

Maximum Operating Pressure — 500 psi  
Maximum Operating Temperature — 180°F  
Ball Through Hole Diameter — .250

### Options

<b>Material Options</b>	316 Stainless Body, Ends and Ball 303 Stainless Body, Ends and Ball Teflon® Seats Stainless Handle Screw
<b>Seal Options</b>	Buna-N, Ethylene Propylene, Fluoroelastomer (Viton®)
<b>End Options</b>	1/4 Male and Female NPT
<b>Body Options</b>	1/4 Female NPT
<b>Handle Options</b>	Stainless Steel Lever with Red Vinyl Sleeve (Standard)

### Example of How To Order

<b>Body Material</b> 303	<b>Inlet End</b> 1/4 MNPT	<b>Outlet End</b> 1/4 FNPT	<b>Seal</b> Buna-N	<b>Handle</b> Reversed
-----------------------------	------------------------------	-------------------------------	-----------------------	---------------------------

**SMC Part Number: SST 303 2000-4M4F-B,RH**

The handle will lie over the Inlet port when the valve is in the open position. SMC Part Numbers are a description of the valve as read left to right, Inlet to Outlet.

Example: SST 303 2000-4M4F-B,RH - 1/4 MNPT Inlet x 1/4 FNPT Outlet

SMC will quote alternate materials or customize our standard products when quantities ensure competitive pricing.