



Vertically Integrated, Made in the USA




### THE SPECIALTY MFG. CO.

5858 Centerville Road • St. Paul, MN 55127-6804

Tel: (651) 653-0599 • Fax: (651) 653-0989

www.specialtymfg.com • e-mail: info@specialtymfg.com

## 638 SERIES BALL VALVE

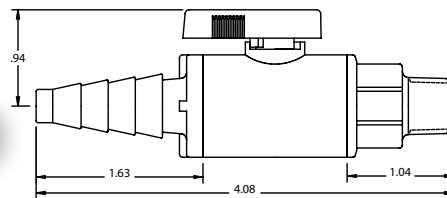

### Design Considerations

The 638 Series Two-Way Ball Valve design promotes multiple configurations to fit the exact end use application. The 638 Series Valve was originally designed for the water purification industry. Most PVC and White Filled Polypropylene configurations are available as NSF Standard 42 Certified. Filled Polypropylene is available for chemical resistance applications.

**Maximum Operating Pressure** — 125 psi  
**Maximum Operating Temperature** — 140°F  
**Ball Through Hole Diameter** — .437

### Options

<b>Material Options</b>	Gray PVC (Standard), White PVC, White Polypropylene, Black Polypropylene, Black Nylon, Black PVDF (Kynar®)	
<b>Seal Options</b>	Buna-N, Ethylene Propylene, Fluoroelastomer (Viton®)	
<b>End Options</b>	1/8, 1/4, 3/8 Male NPT 1/4, 3/8, 1/2 Female NPT 1/4, 3/8 SMC Push-To-Connect 1/8, 1/4, 3/8, 1/2 Hose Barb	3/8 BIB (Smooth Barb) Tapered Barb 1/4, 3/8 JACO (Not NSF Standard 42 Certified)
<b>Handle Options</b>	Long Handle (Standard), Short Handle	

### Example of How To Order

<b>Body Material</b> PVC	<b>Inlet End</b> 1/4 MNPT	<b>Outlet End</b> 1/4 FNPT	<b>Seal</b> Buna-N	<b>Handle</b> Short
-----------------------------	------------------------------	-------------------------------	-----------------------	------------------------

**SMC Part Number:** PVC 638-4M4F-B,SHORT HDL

The handle will lie over the Inlet port when the valve is in the open position. SMC Part Numbers are a description of the valve as read left to right, Inlet to Outlet.

Example: PVC 638-4M4F-B,SHORT HDL = 1/4 MNPT Inlet x 1/4 FNPT Outlet

SMC will quote alternate materials or customize our standard products when quantities ensure competitive pricing.