

S30 SERIES

DEPENDABLE HIGH PRESSURE & HIGH FLOW WORKHORSE

The S30 Series is a special purpose, double shut-off fluid transfer quick coupling that provides significantly less pressure drop than couplings of the same type produced by other manufacturers. A threaded sleeve locking mechanism mates the coupling halves and allows connection-under-pressure up to a maximum of 1,000 psi. Our heavy-duty poppet valving, while fully interchangeable with ball check models (including older SafeWay products), eliminates low pressure leakage. The S30 Series is designed for extreme high pressure applications, including portable hydraulic rams, wire pullers, and frame straightening equipment.





- SafeWay's S30 Series outperforms other brands by 100%!
- Full-flow design provides less than half the pressure loss of other brands, allowing for quicker ram response.
- Meets dimensional requirements of this accepted interchange.
- Interchangeable half-for-half with the Parker/Pioneer 3000 Series, Enerpac C-604, Eaton W56 Series, Faster PVVM and PVSM and Power Team 9795.
- Available in 1/4" and 3/8" body size with pipe thread standard.
- Poppet style valving with double shut-off. Captive poppet seal provides a durable, guaranteed leak-free seal.
- All S30 Series quick couplings are 100% leak tested.
- Fully interchangeable, half-for-half, with ball valve designs.
- Machined from solid steel barstock.
- Designed for extreme high pressure applications such as portable hydraulic rams, wire pullers, etc.
- Rated working pressure of 10,000 psi in all sizes. Threaded sleeve locking mechanism mates coupling halves. Couplings can be connected under pressure up to 1,000 psi.
- Heavy-duty steel dust caps and dust plugs are available.
- Method of obtaining and presenting performance data conforms to ANSI (NFPA) T3.20.2.R2, *Hydraulic fluid power - Quick action couplings - Test methods*.

PERFORMANCE DATA

PART NUMBERS & DESCRIPTIONS						OPERATING PRESSURE		NFPA RATED FLOW	
Complete Coupler	Female Body Half	Thread Size	Male Tip Half	Thread Size	Body Size	Maximum		GPM	(LPM)
						PSI	(BAR)		
S30-2P	S35-2P	1/4" Male Pipe	S31-2P	1/4" Female Pipe	1/4"	10,000	(690)	3	(12)
S30-2P-6W	S35-2P-6W	9/16"-18 Female ORB	S31-2P-6W	9/16"-18 Female ORB	1/4"	10,000	(690)	3	(12)
S30-3P	S35-3P	3/8" Male Pipe	S31-3P	3/8" Female Pipe	3/8"	10,000	(690)	6	(23)

Temperature Range: Standard Seals (Buna-N) -40° to +250° F Polyurethane Option -40° to +212° F Other Seals Available.
 Vacuum Data: 27.4 inches Hg. both connected and disconnected – all sizes.

Pressure rating (Max. Operating Pressure) is based on Non-Pulsating, Low Cycle applications with essentially steady pressure during the operating cycle. Please consult factory regarding other applications.

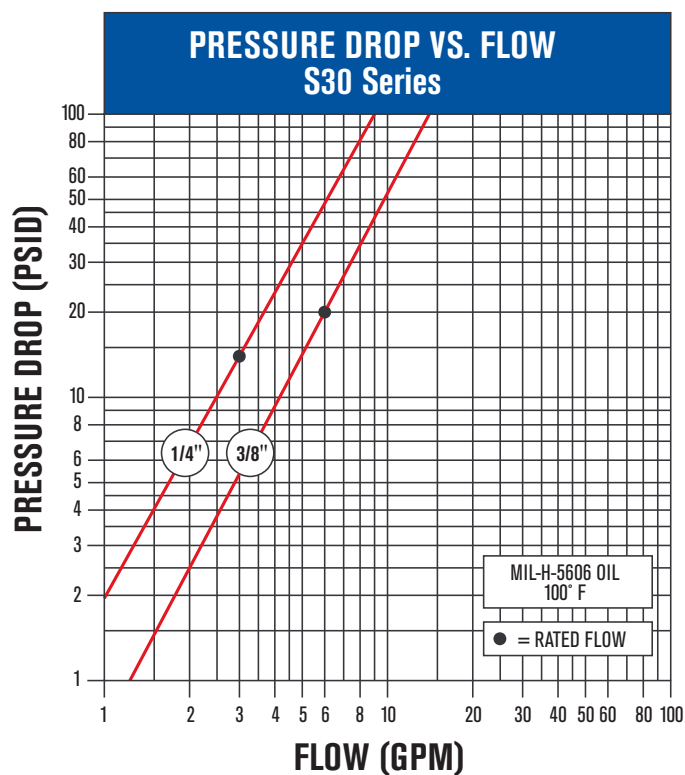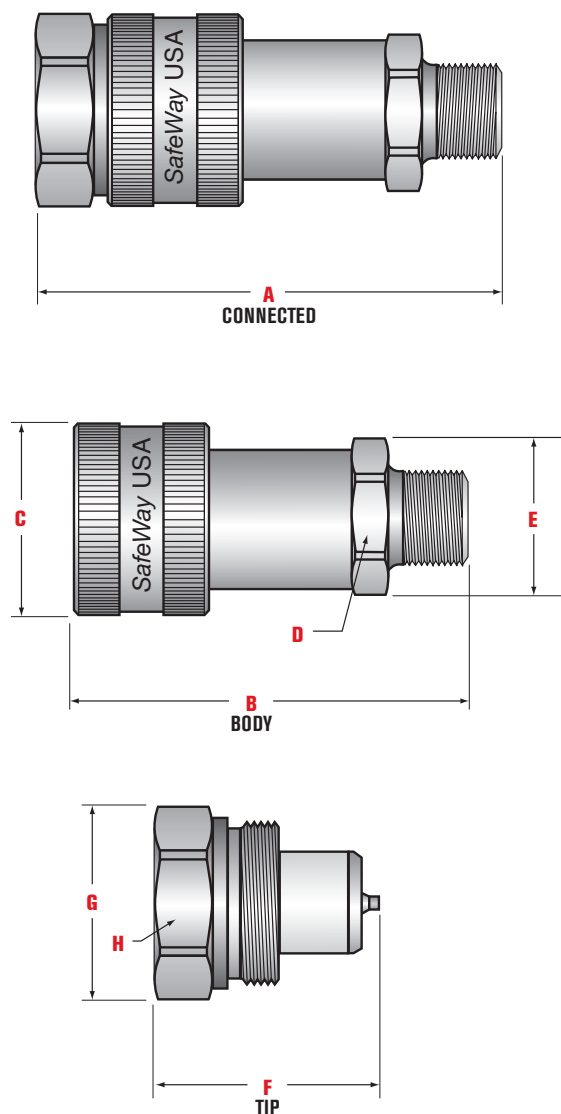

DIMENSIONAL DATA

Complete Coupler Number	DIMENSIONS (inches)							
	Overall Length A	Body Length B	Diameter C	Hex D	Diameter E	Tip Length F	Diameter G	Wrench Hex Flat H
S30-2P	2.78	2.27	1.19	.81	.93	1.36	1.06	.87
S30-2P-6W	2.92	2.27	1.12	.81	.96	1.50	1.30	1.12
S30-3P	3.35	2.82	1.38	1.00	1.12	1.65	1.40	1.25

See pages 34-36 for accessories to the S30 Series.

S51 SERIES

HEAVY-DUTY, DOUBLE SHUT-OFF QUICK COUPLING

SafeWay's S51 Series is a minimum spill, thread-to-connect, fluid transfer quick coupling designed for use with most industrial fluids. It can be connected under full system pressure by rotating the female threaded heavy-duty ductile cast iron wing nut or steel hex nut onto the mating male threaded tip (nipple).

- Applications include "wet-line-kits" used widely on dump trailers, mobile drilling rigs, mining equipment, large mobile equipment, salt spreaders, and chemical transfer units.
- Minimum air inclusion during connection and minimum fluid spillage during disconnection.
- Interchangeable half-for-half with the Parker/Pioneer 6100 Series, Eaton FD51 (5100) Series, and Snap-Tite 78 Series.
- Brass body, tip and poppet, combined with a rugged steel valve, provide corrosion resistance and durability.
- Optional electroless nickel plated steel (-STL) tip and body shell is combined with standard internal parts and locking mechanism to provide a rugged, less costly alternative that is well suited for most applications.
- All S51 Series quick couplings are 100% leak tested.
- Connection-under-pressure can be accomplished due to our heavy-duty poppet assembly with bonded valve seals.



- A rugged, high quality machined carbon steel valve; no powdered metal parts.
- Available with either a ductile cast iron wing nut or heavy duty steel hex nut to make a threaded connection.
- SafeWay's Ductile Cast Iron Wing Nut is specifically built to withstand hammer blows associated with connection and disconnection-under-pressure.
- Available heavy-duty flange provides a simple and reliable method of bulkhead mounting the quick coupling.
- Completely field serviceable with seal repair kits.
- Method of obtaining and presenting performance data conforms to ANSI (NFPA) T3.20.2.R2, *Hydraulic fluid power - Quick action couplings - Test methods*.

PERFORMANCE DATA



PART NUMBERS			DESCRIPTION			OPERATING PRESSURE		NFPA RATED FLOW	
Complete Coupler	Female Body Half	Male Tip Half	Body Size	Locking Style	Thread Size and Description	Maximum		GPM	(LPM)
						PSI	(BAR)		
S51W-6-1/2	S515W-6-1/2	S511-6-1/2	3/4"	Wing	1/2" Female Pipe	3,000	(207)	28	(106)
S51H-6-1/2	S515H-6-1/2	S511-6-1/2	3/4"	Hex Nut	1/2" Female Pipe	3,000	(207)	28	(106)
S51W-6	S515W-6	S511-6	3/4"	Wing	3/4" Female Pipe	3,000	(207)	28	(106)
S51H-6	S515H-6	S511-6	3/4"	Hex Nut	3/4" Female Pipe	3,000	(207)	28	(106)
S51W-6-STL	S515W-6-STL	S511-6-STL	3/4"	Wing	3/4" Female Pipe	3,000	(207)	28	(106)
S51H-6-STL	S515H-6-STL	S511-6-STL	3/4"	Hex Nut	3/4" Female Pipe	3,000	(207)	28	(106)
S51W-8	S515W-8	S511-8	1"	Wing	1" Female Pipe	3,000	(207)	50	(189)
S51H-8	S515H-8	S511-8	1"	Hex Nut	1" Female Pipe	3,000	(207)	50	(189)
S51W-8-STL	S515W-8-STL	S511-8-STL	1"	Wing	1" Female Pipe	3,000	(207)	50	(189)
S51H-8-STL	S515H-8-STL	S511-8-STL	1"	Hex Nut	1" Female Pipe	3,000	(207)	50	(189)
S51W-10	S515W-10	S511-10	1-1/4"	Wing	1-1/4" Female Pipe	2,500	(172)	76	(288)
S51H-10	S515H-10	S511-10	1-1/4"	Hex Nut	1-1/4" Female Pipe	2,500	(172)	76	(288)
S51W-10-STL	S515W-10-STL	S511-10-STL	1-1/4"	Wing	1-1/4" Female Pipe	2,500	(172)	76	(288)
S51H-10-STL	S515H-10-STL	S511-10-STL	1-1/4"	Hex Nut	1-1/4" Female Pipe	2,500	(172)	76	(288)

-STL has an electroless nickel plated steel body and tip shell with standard internal parts.

Temperature Range: Standard Seals (Buna-N) -40° to +250° F Viton® Option -15° to +450° F
Vacuum Data: 27.4 inches Hg. both connected and disconnected.

Viton® is a registered trademark of DuPont Dow Elastomers.

Pressure rating (Max. Operating Pressure) is based on Non-Pulsating, Low Cycle applications with essentially steady pressure during the operating cycle. Please consult factory regarding other applications.

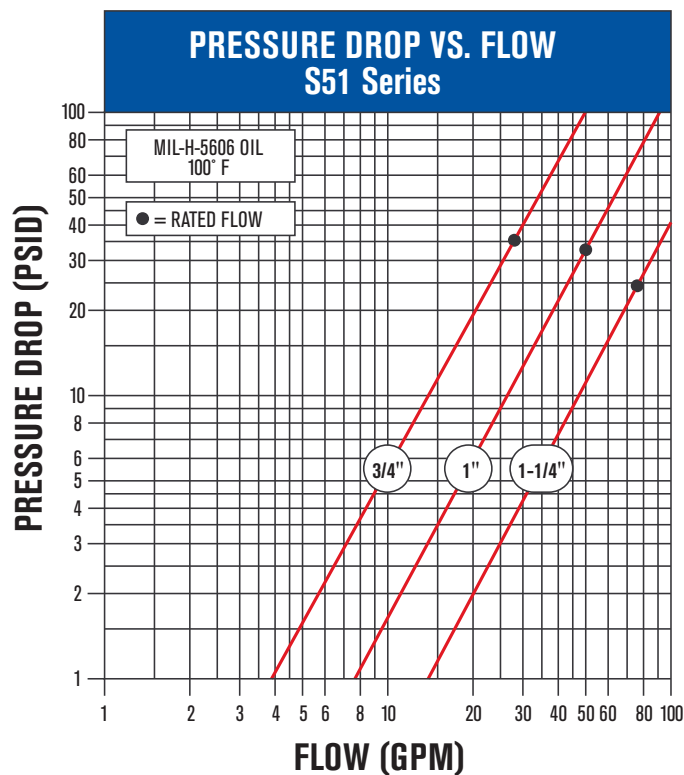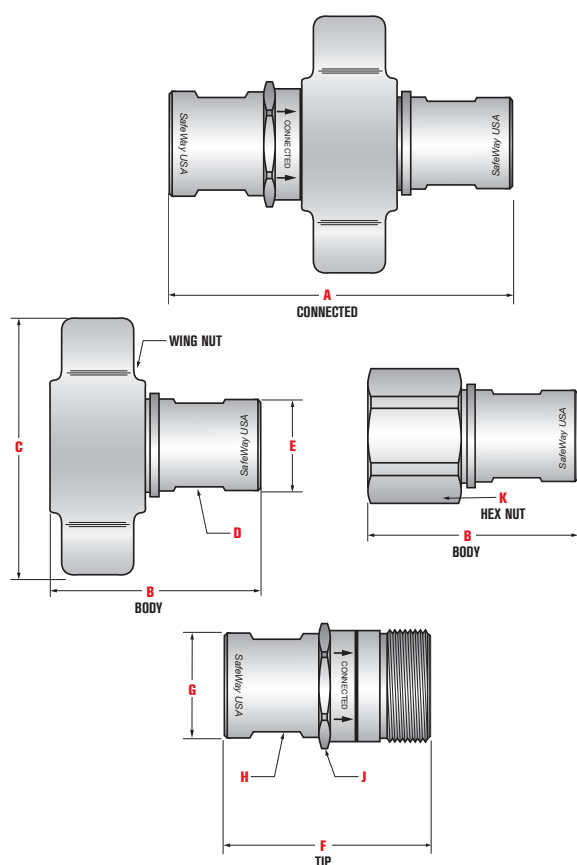

DIMENSIONAL DATA

Complete Coupler Number	DIMENSIONS (inches)									
	Overall Length	Body Length	Wing Nut Length	Wrench Flat	Diameter	Tip Length	Diameter	Wrench Flat	Hex	Hex
	A	B	C	D	E	F	G	H	J	K
S51W-6-1/2	4.75	2.72	4.06	1.16	1.25	3.05	1.36	1.16	1.62	—
S51H-6-1/2	4.75	2.72	—	1.16	1.25	3.05	1.36	1.16	1.62	1.75
S51W-6	4.75	2.72	4.06	1.16	1.25	3.05	1.36	1.16	1.62	—
S51H-6	4.75	2.72	—	1.16	1.25	3.05	1.36	1.16	1.62	1.75
S51W-6-STL	4.75	2.72	4.06	1.16	1.25	3.05	1.36	1.16	1.62	—
S51H-6-STL	4.75	2.72	—	1.16	1.25	3.05	1.36	1.16	1.62	1.75
S51W-8	5.40	3.32	4.38	1.43	1.56	3.30	1.74	1.56	1.88	—
S51H-8	5.40	3.32	—	1.43	1.56	3.30	1.74	1.56	1.88	2.12
S51W-8-STL	5.40	3.32	4.38	1.43	1.56	3.30	1.74	1.56	1.88	—
S51H-8-STL	5.40	3.32	—	1.43	1.56	3.30	1.74	1.56	1.88	2.12
S51W-10	5.69	3.66	5.20	1.77	1.89	3.42	2.08	1.88	2.12	—
S51H-10	5.69	3.66	—	1.77	1.89	3.42	2.08	1.88	2.12	2.50
S51W-10-STL	5.69	3.66	5.20	1.77	1.89	3.42	2.08	1.88	2.12	—
S51H-10-STL	5.69	3.66	—	1.77	1.89	3.42	2.08	1.88	2.12	2.50

-STL has an electroless nickel plated steel body and tip shell with standard internal parts.

See pages 34-36 for accessories to the S51 Series.